



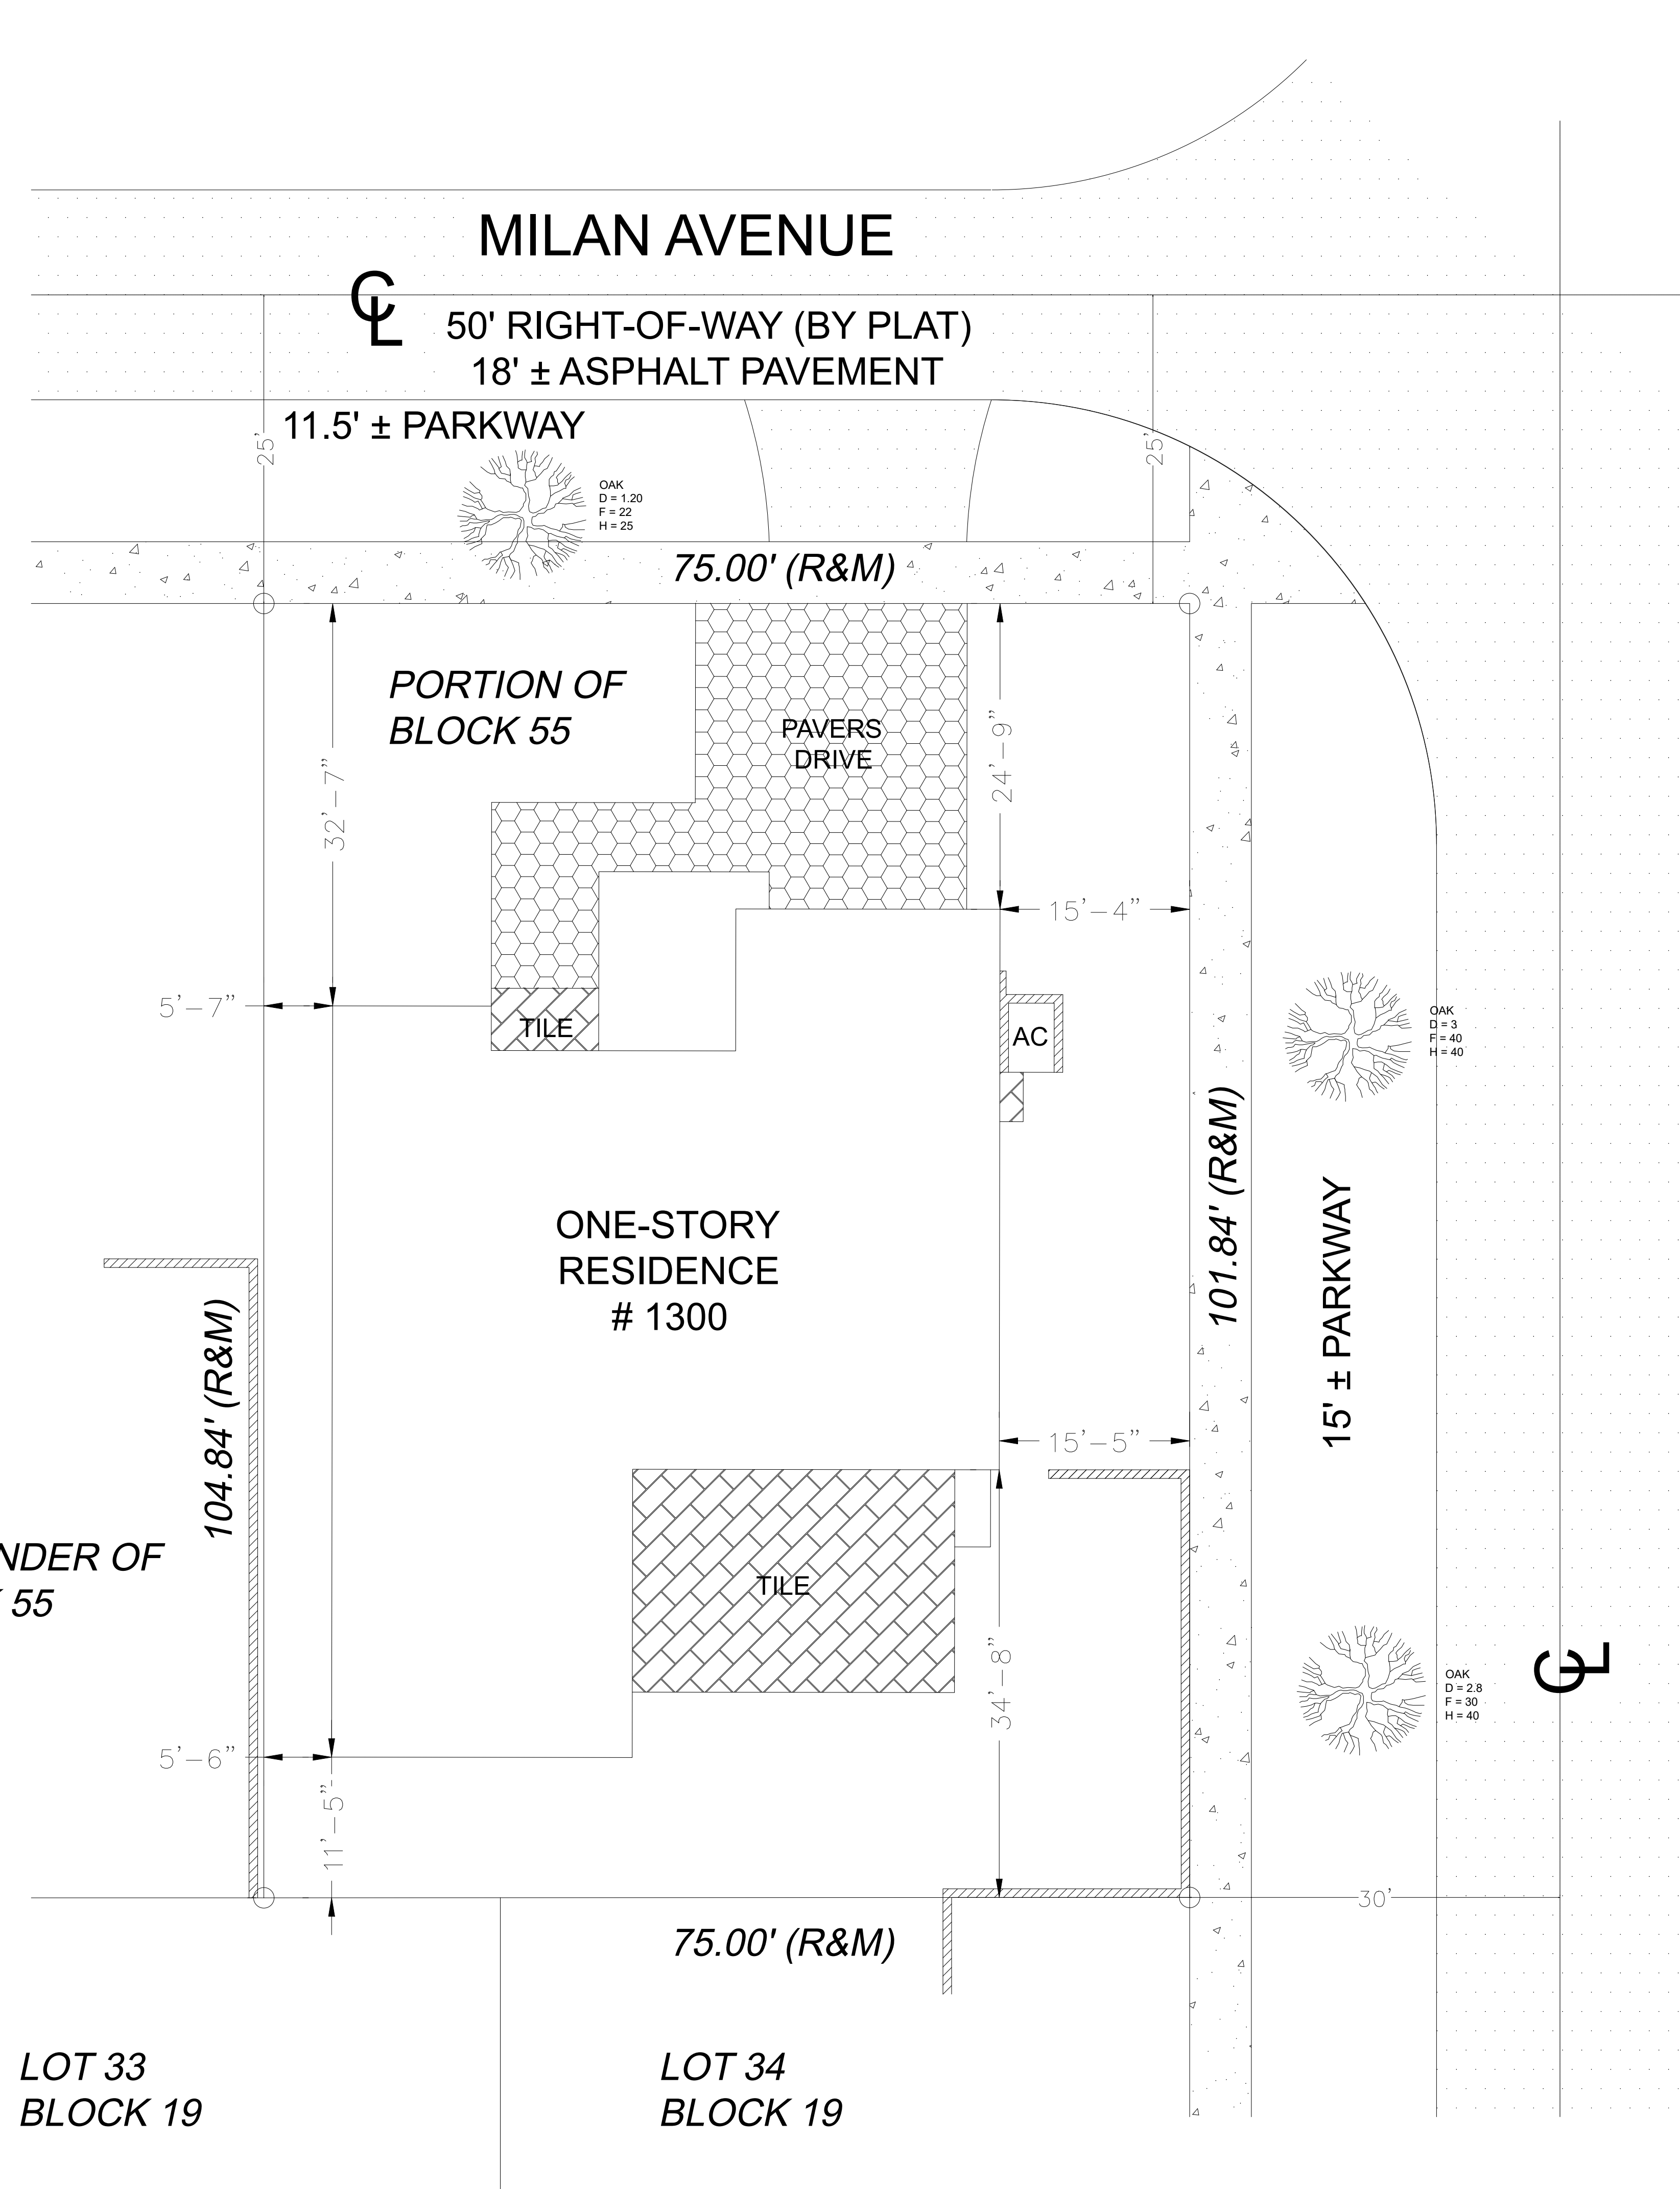

EXISTING SITE PLAN
3/32" = 1'-0"

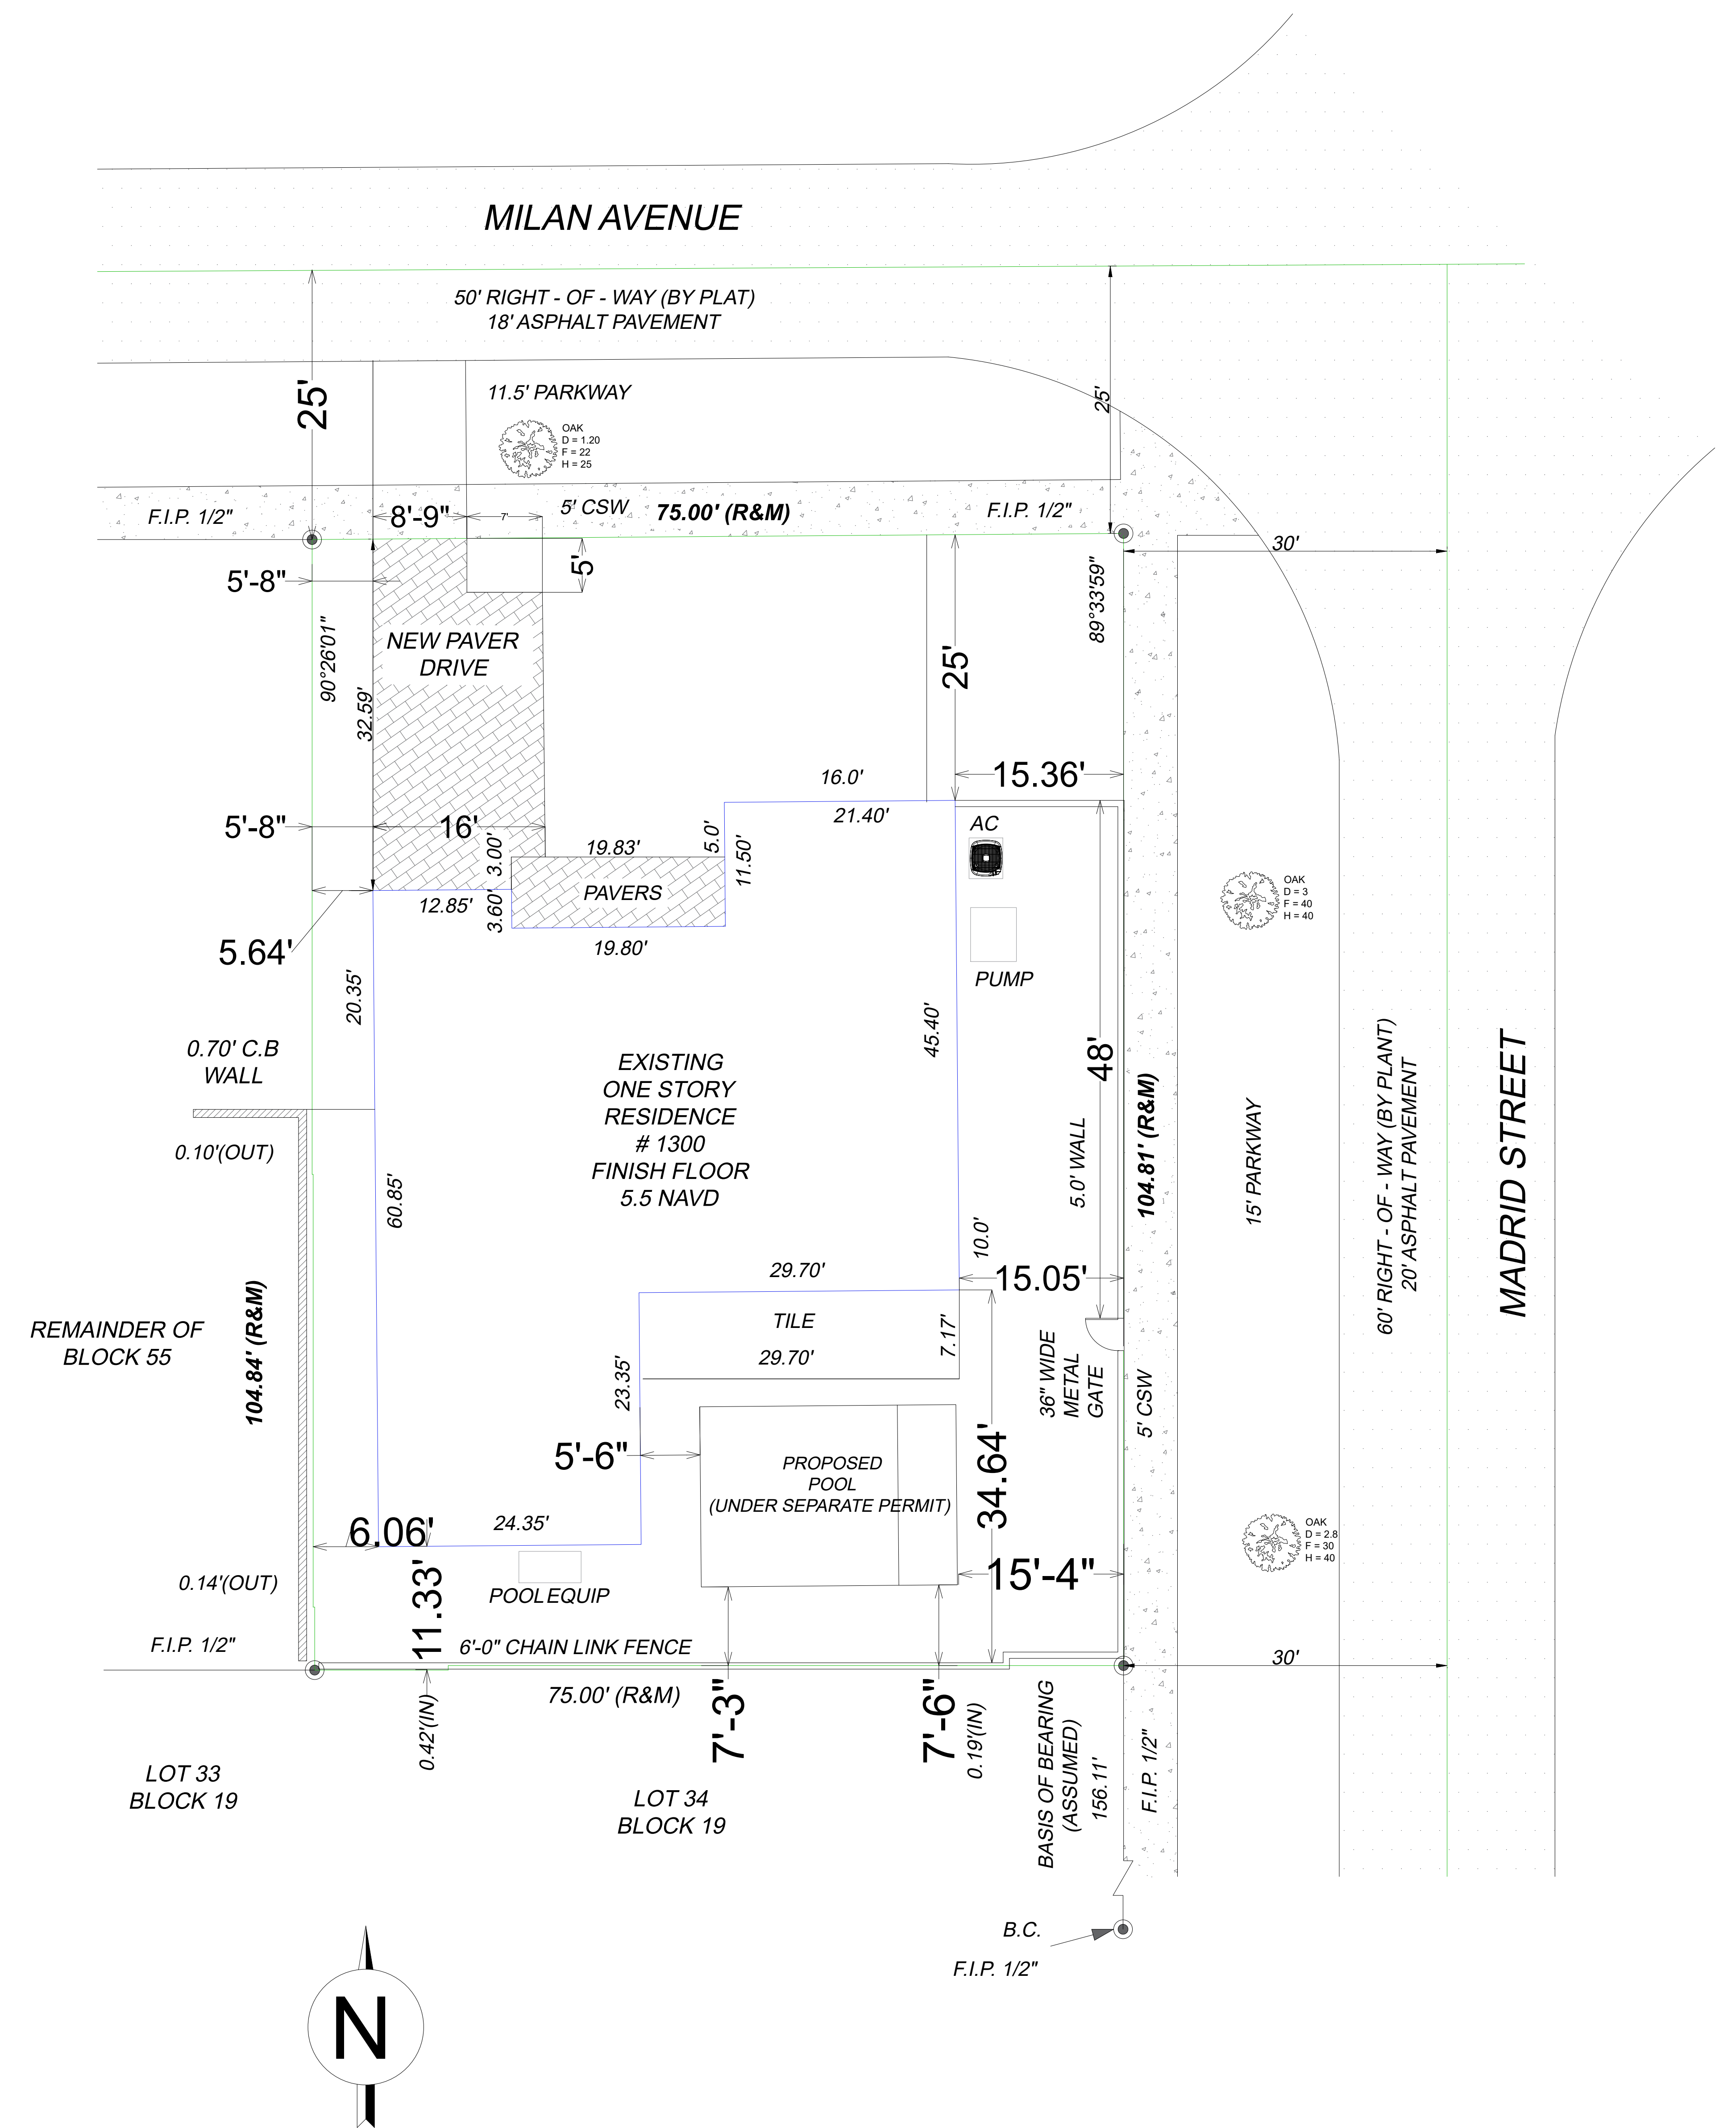

PROPOSED SITE PLAN
3/32" = 1'-0"

Termite protection:

COMPLIANCE WITH F.B.C.–R318.5 PROTECTION AGAINST DECAY AND TERMITES.
TERMITE PROTECTION SHALL BE PROVIDE BY FLORIDA REGISTERED TERMITICIDES OR OTHER APPROVED METHODS OF TERMITE PROTECTION LABELED FOR USE AS A PREVENTATIVE TREATMENT TO NEW CONSTRUCTION.

SOIL SHALL BE TERMITE TREATED PRIOR TO CONSTRUCTION. SOIL APPLIED PESTICIDES, BAITING SYSTEMS, AND PESTICIDES APPLIED TO WOOD, OR OTHER APPROVED METHODS OF TERMITE PROTECTION LABELED FOR USE AS A PREVENTATIVE TREATMENT TO NEW CONSTRUCTION. SEE SECTION 202, “REGISTERED TERMITICIDE.” UPON COMPLETION OF THE APPLICATION OF THE TERMITE PROTECTIVE TREATMENT, A CERTIFICATE OF COMPLIANCE SHALL BE ISSUED TO THE BUILDING DEPARTMENT BY THE LICENSED PEST CONTROL COMPANY THAT CONTAINS THE FOLLOWING STATEMENT: “THE BUILDING HAS RECEIVED A COMPLETE TREATMENT FOR THE PREVENTION OF SUBTERRANEAN TERMITES. TREATMENT IS IN ACCORDANCE WITH RULES AND LAWS ESTABLISHED BY THE FLORIDA DEPARTMENT OF AGRICULTURE AND CONSUMER SERVICES.”

CONTRACTOR SHALL POST A WEATHER RESISTANT JOB BOARD TO RECEIVE DUPLICATE TREATMENT CERTIFICATES & SHALL DISPLAY PRODUCT USED IDENTITY OF APPLICATOR, TIME & DATE OF TREATMENT, SITE LOCATION, AREA TREATED, CHEMICAL USED, PERCENT CONCENTRATION & NUMBER OF GALLONS USED.

Drainage note:


ALL DRAINAGE SHALL BE CONTAINED ON PROPERTY AND SHALL NOT DRAIN ONTO NEIGHBORING PROPERTY

SLOPE GRADE AWAY FROM NEW CONSTRUCTION

Surveyor note:

CONTRACTOR SHALL FIELD VERIFY, PRIOR TO CONSTRUCTION, THAT ALL SETBACKS ARE MET PER SITE PLAN AND THAT RESIDENCE AND ITS AMNENITIES SIT ON SITE EXACTLY AS PER THIS SITE PLAN. ANY AND ALL DISCREPANCIES SHALL BE REPORTED TO THE ARCHITECT PRIOR TO THE COMMENCEMENT OF CONSTRUCTION.

ALL ELECTRICAL, MECHANICAL & PLUMBING EQUIPMENT IS TO BE ABOVE BASE FLOOD ELEVATION (+5.34” NAVD) – ALL CONSTRUCTION & FINISH MATERIALS BELOW BASE FLOOD ELEVATION ARE TO BE FLOOD RESISTANT.

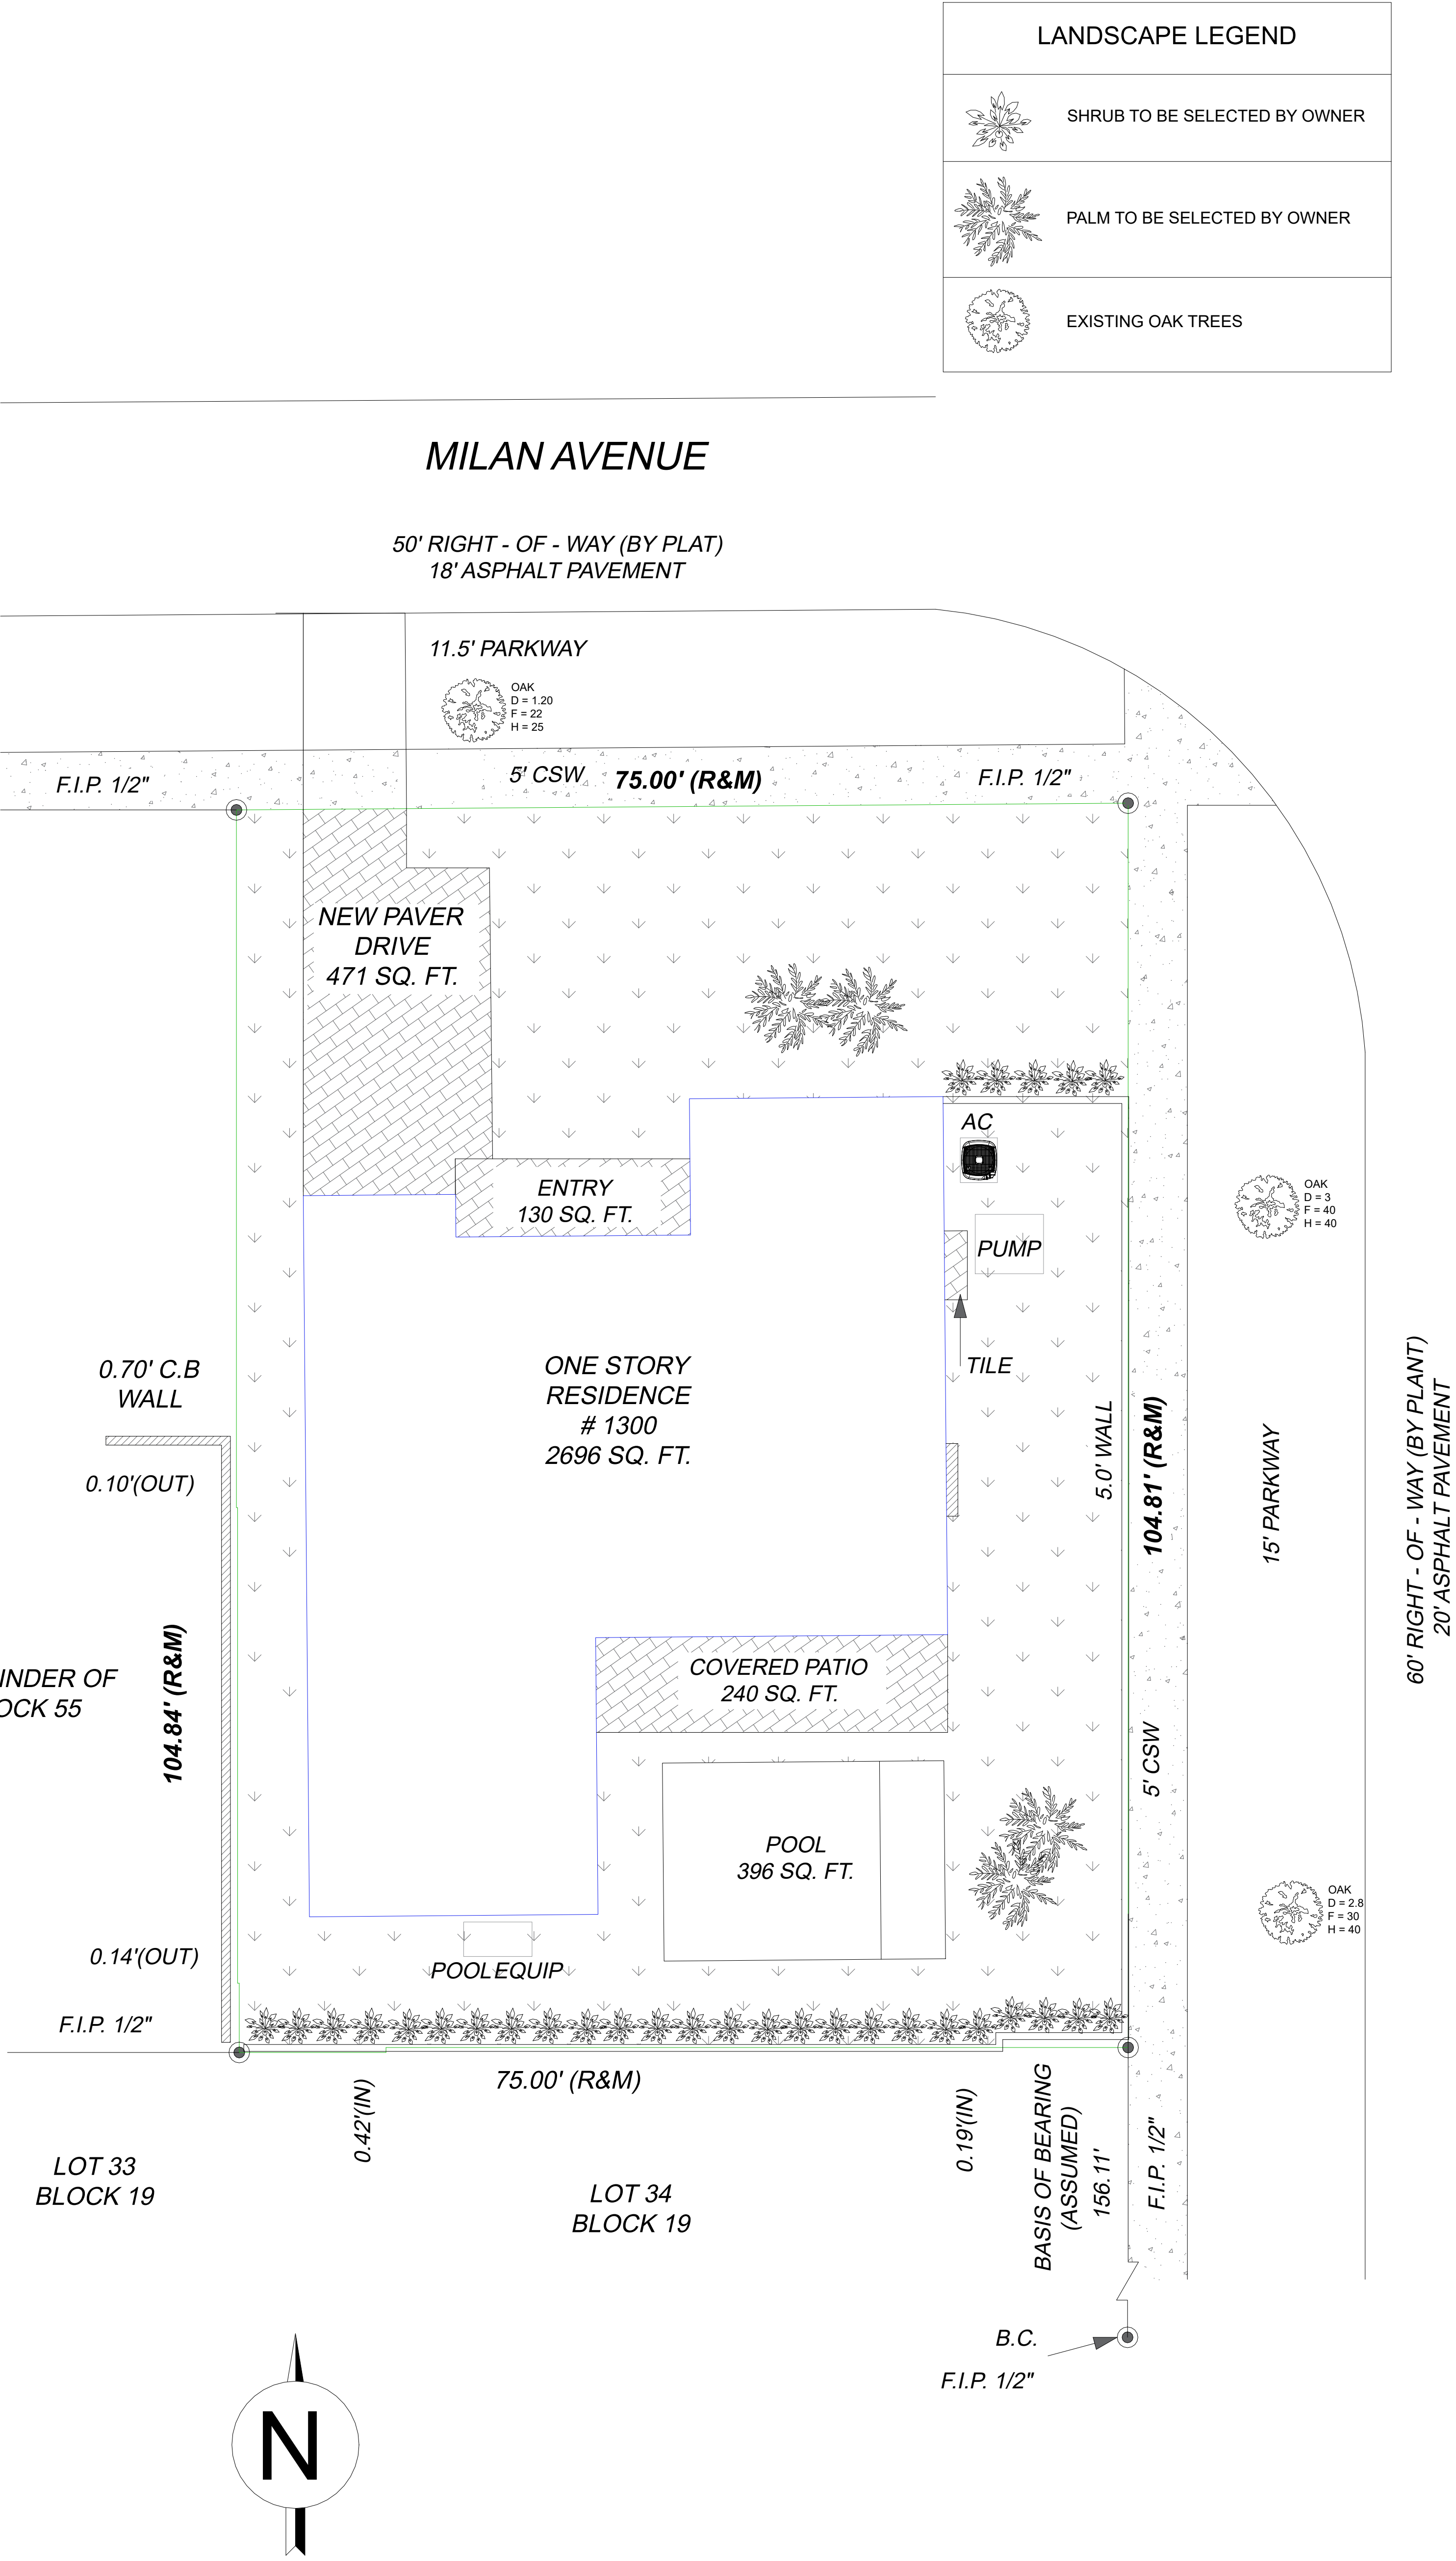


LANDSCAPE PLAN
3/32" = 1'-0"


DEMO NOTES:

- THIS DRAWING IS ONLY TO ASSIST IN SHOWING THE SCOPE OF DEMOLITION WORK AND IT IS NOT INTENDED TO INDICATE ALL DEMOLITION. CONTRACTOR SHALL REMOVE ALL EXISTING ITEMS AS REQUIRED TO COMPLETE THE WORK.
- NOT ALL ITEMS TO BE DEMOLISHED ARE SHOWN ON THE PLAN. CONTRACTOR SHALL BE RESPONSIBLE FOR PERFORMING A WALK THROUGH OF THE PROJECT TO IDENTIFY POSSIBLE CRITICAL ITEMS NOT OR INCORRECTLY ADDRESSED, WHICH REQUIRE REMOVAL/RELOCATION PRIOR TO SUBMITTING A BID TO THE OWNER.
- CUT, REMOVE, PATCH, AND REFINISH EXISTING CONSTRUCTION AS REQUIRED TO LEAVE WORK COMPLETE AND IN SATISFACTORY CONDITION.
- CONTRACTOR IS TO PROTECT ALL CONCEALED UTILITIES, ASSURE PROPER IDENTIFICATION OF ALL UTILITIES AND CAP AS REQUIRED.
- DEMOLITION & REPAIR WORK MAY ENTAIL INTERVENTIONS IN AREAS OUTSIDE OF THE IMMEDIATE SCOPE OF WORK IN VARIOUS AREAS WITHIN THE SCOPE. IT MAY REQUIRE WORK INVOLVING REMOTE UTILITY LINES (ELECTRICAL, COMMUNICATIONS, DATA, ETC...). ANY WORK IN AREAS OUTSIDE OF THE IMMEDIATE SCOPE OF WORK SHALL BE ALL-INCLUSIVE, PROVIDING ALL UTILITIES, FINISHES AND EQUIPMENT REQUIRED TO RESTORE THE AREA TO FULLY OPERATIONAL CONDITIONS.
- PATCH AND REPAIR ALL EXISTING SURFACES DAMAGED BY DEMOLITION AS REQUIRED, TO MATCH ADJACENT SURFACES.
- COORDINATE WITH OWNER PRIOR TO DEMOLITION FOR ALL ITEMS WHICH WILL REQUIRE RELOCATION, STORAGE OR TURN OVER TO THE OWNER FOR ALL MATERIAL REMOVED FROM EXISTING CONSTRUCTION.
- PLANS SHALL BE SUBMITTED BY THE CONTRACTOR PRIOR TO COMMENCING WORK FOR ALL PHASING, STAGING, CONSTRUCTION AREAS AND MAINTENANCE OF REQUIRED CLEARANCES FOR OPERATIONS, EXITING AND ACCESS AT THE EXISTING SITE IN ACCORDANCE WITH ALL APPLICABLE CODES.
- PRIOR TO START OF WORK, CONTRACTOR SHALL CONFIRM ALL EXISTING CONDITIONS. CONFIRM ALL UTILITIES. SHOULD ANY PROBLEMS BE EVIDENT, NOTIFY THE OWNER AND ARCHITECT FOR DIRECTION. THE FIRE ALARM AND COVERAGE FOR THE SURROUNDING AREAS SHALL REMAIN IN OPERATION AT ALL TIMES.
- DO NOT SCALE DRAWINGS.
- THE GENERAL CONTRACTOR SHALL BE RESPONSIBLE TO FIELD CHECK AND VERIFY ALL DIMENSIONS AND CONDITIONS AND NOTIFY THE OWNER AND ARCHITECT IF ANY DISCREPANCIES ARE FOUND.
- ALL AREAS OF DEMOLITION OPERATIONS SHALL BE PROPERLY POSTED WITH SIGNS WARNING OF DANGER. SUFFICIENT WATCH PERSONS SHALL BE PROVIDED TO WARN WORKERS OF IMPENDING DANGERS, AND ALL UNAUTHORIZED PERSONS SHALL BE EXCLUDED FROM PLACES WHERE DEMOLITION IS IN PROGRESS.
- ALL TREES & STUMPS DESIGNATED FOR RELOCATION OR REMOVAL TO REMOVE ENTIRE ROOT STRUCTURE AND SHALL BE EXCAVATED AS REQUIRED.
- TREE STUMPS SHALL BE REMOVED TO THEIR FULL DEPTH. ROOTS 3 INCH AND LARGER SHALL BE REMOVED TO A DEPTH OF 2 FEET BELOW FINISHED GRADE. STUMPS SHALL BE LEGALLY DISPOSED OF OFF-SITE.
- CONTRACTOR TO MAINTAIN SAFE INGRESS AND EGRESS TO THE SITE AT ALL TIMES. COORDINATE WITH OWNER FOR PHASING.
- CONTRACTOR SHALL COORDINATE WITH OWNER FOR RELOCATION OF ANY EXISTING UTILITIES. REMOVE ALL FOUNDATIONS AND UNDERGROUND UTILITIES. CAP AND TERMINATE AS REQUIRED.
- CONTRACTOR TO COORDINATE SURVEY, CIVIL, MECHANICAL, ELECTRICAL, PLUMBING, FIRE PROTECTION DRAWINGS FOR UTILITY CONNECTIONS, TRENCHING, AND REQUIRED DEMOLITION. COORDINATE WITH OWNER FOR ALL TIE-INS AND SYSTEMS CONNECTIONS.
- CONTRACTOR TO COORDINATE AND PROVIDE MAINTENANCE OF TRAFFIC OPERATIONS PLAN (WITH ALL APPLICABLE MUNICIPAL APPROVALS) FOR ALL TEMPORARY SIDEWALK/ROADWAY/UTILTIES WORK TO MAINTAIN EGRESS AND ACCESS FOR THE SITE DURING CONSTRUCTION & COORDINATE REPLACEMENT OF TEMPORARY SIDEWALK PRIOR TO COMPLETION OF CONSTRUCTION. SEE CIVIL DRAWINGS.
- CONTRACTOR TO REVIEW ALL EXISTING PARTIALLY BUILT WALL AND LOOK FOR DETERIATION OF REINFORCE STEEL, CONCRETE & MASONRY. CHANGE ALL RUSTED REBAR TIES.
- REMOVE ALL DEBRIS FROM CMU CELLS AND REMOVE RUST OF STEEL DOWELS. ANY EXISTING DOWEL TO BE REUSED SHALL HAVE MIN. 94% OF THE ORIGINAL SECTION AREA & MIN. 96% OF THE DIAMETER OTHERWISE REPLACE DRILLING & SETTING IN EPOXY. A NEW ONE PER STRUCTURE DRAWINGS INSTRUCTIONS.
- CUT ALL EXISTING DOWELS THAT WILL NOT BE USED, GRING BELOW SURFACE, CLEAN & COVER WITH EPOXY MORTAR.
- EXISTING FOOTS MAY REMAIN AND BE CONNETED TO NEW PER STRUCTURAL DRAWINGS.

LEGEND	
	NO WORK
	WALL TO BE REMOVED
	CMU WALL TO REMAIN
	STONE VENEER WALL TO REMAIN

DEMO PLAN LEGEND	
#	DESCRIPTION
1	REMOVE EXISTING WINDOW.
2	REMOVE A PORTION OF EXISTING EXTERIOR WALL.
3	REMOVE EXISTING DOOR.
4	REMOVE EXISTING PARTITION WALL.
NOTES	1. CONTRACTOR SHALL VERIFY ALL WALLS TO BE NON-LOAD BEARING PRIOR TO REMOVAL.

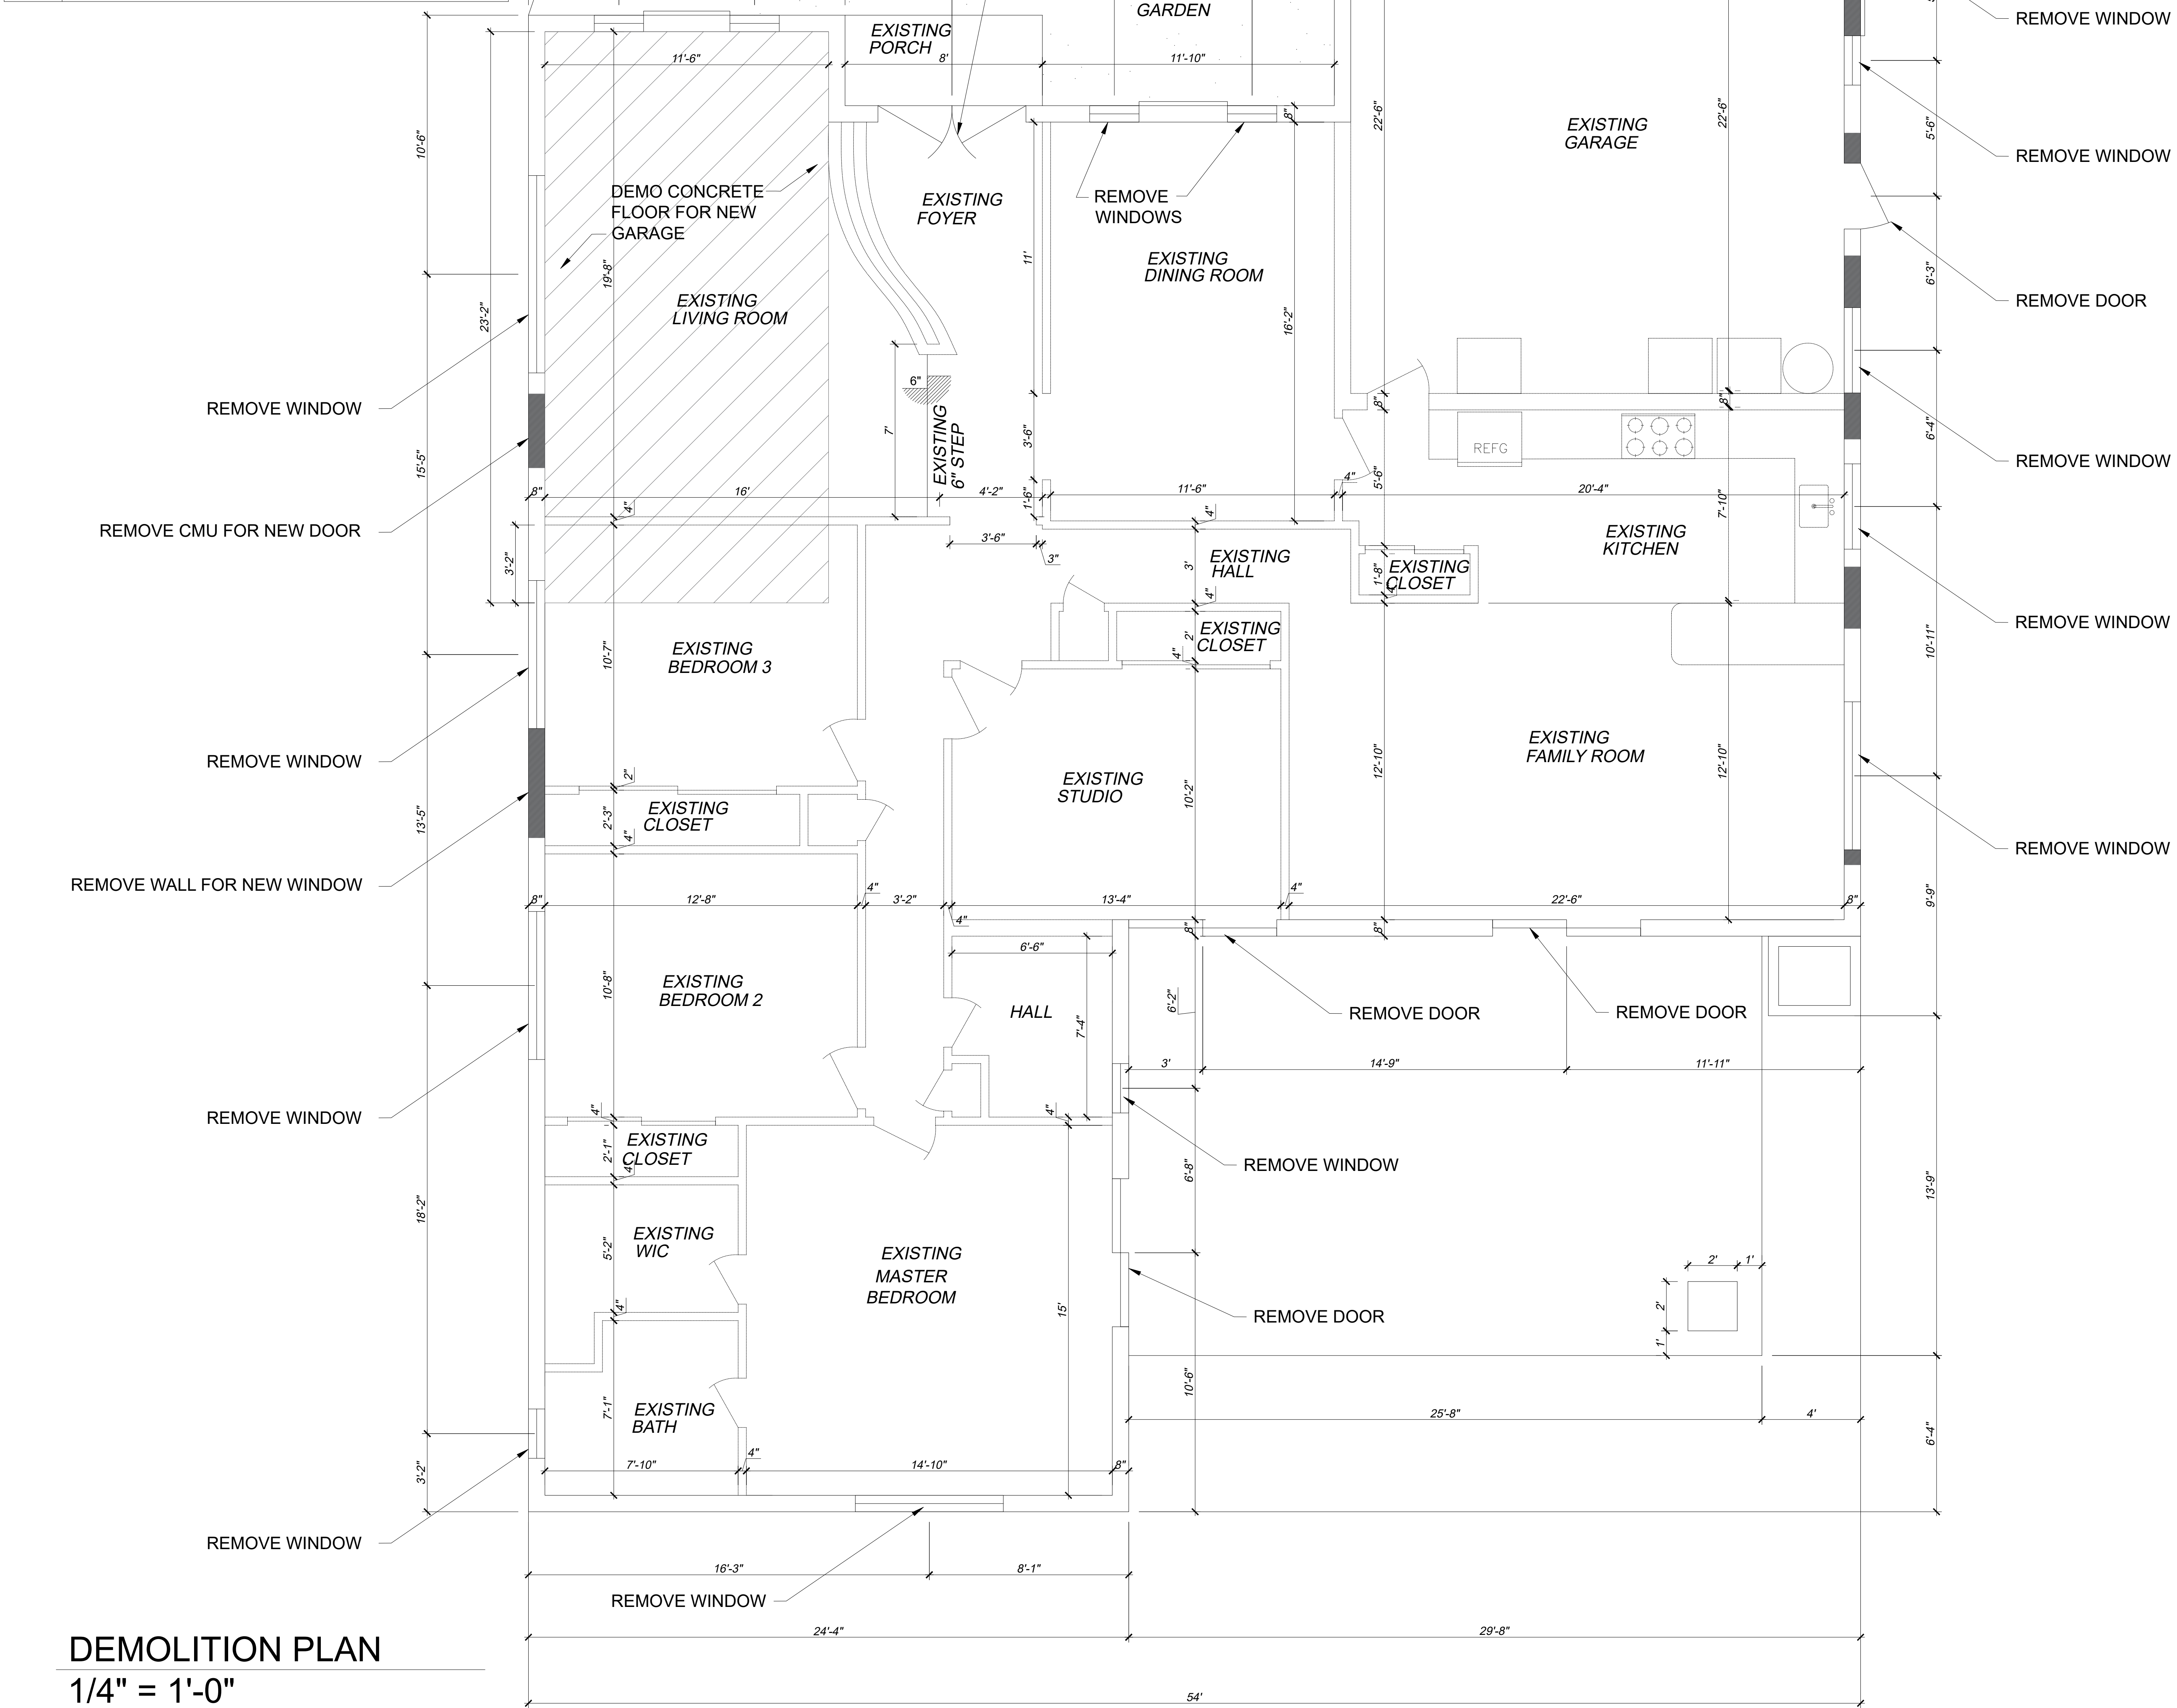


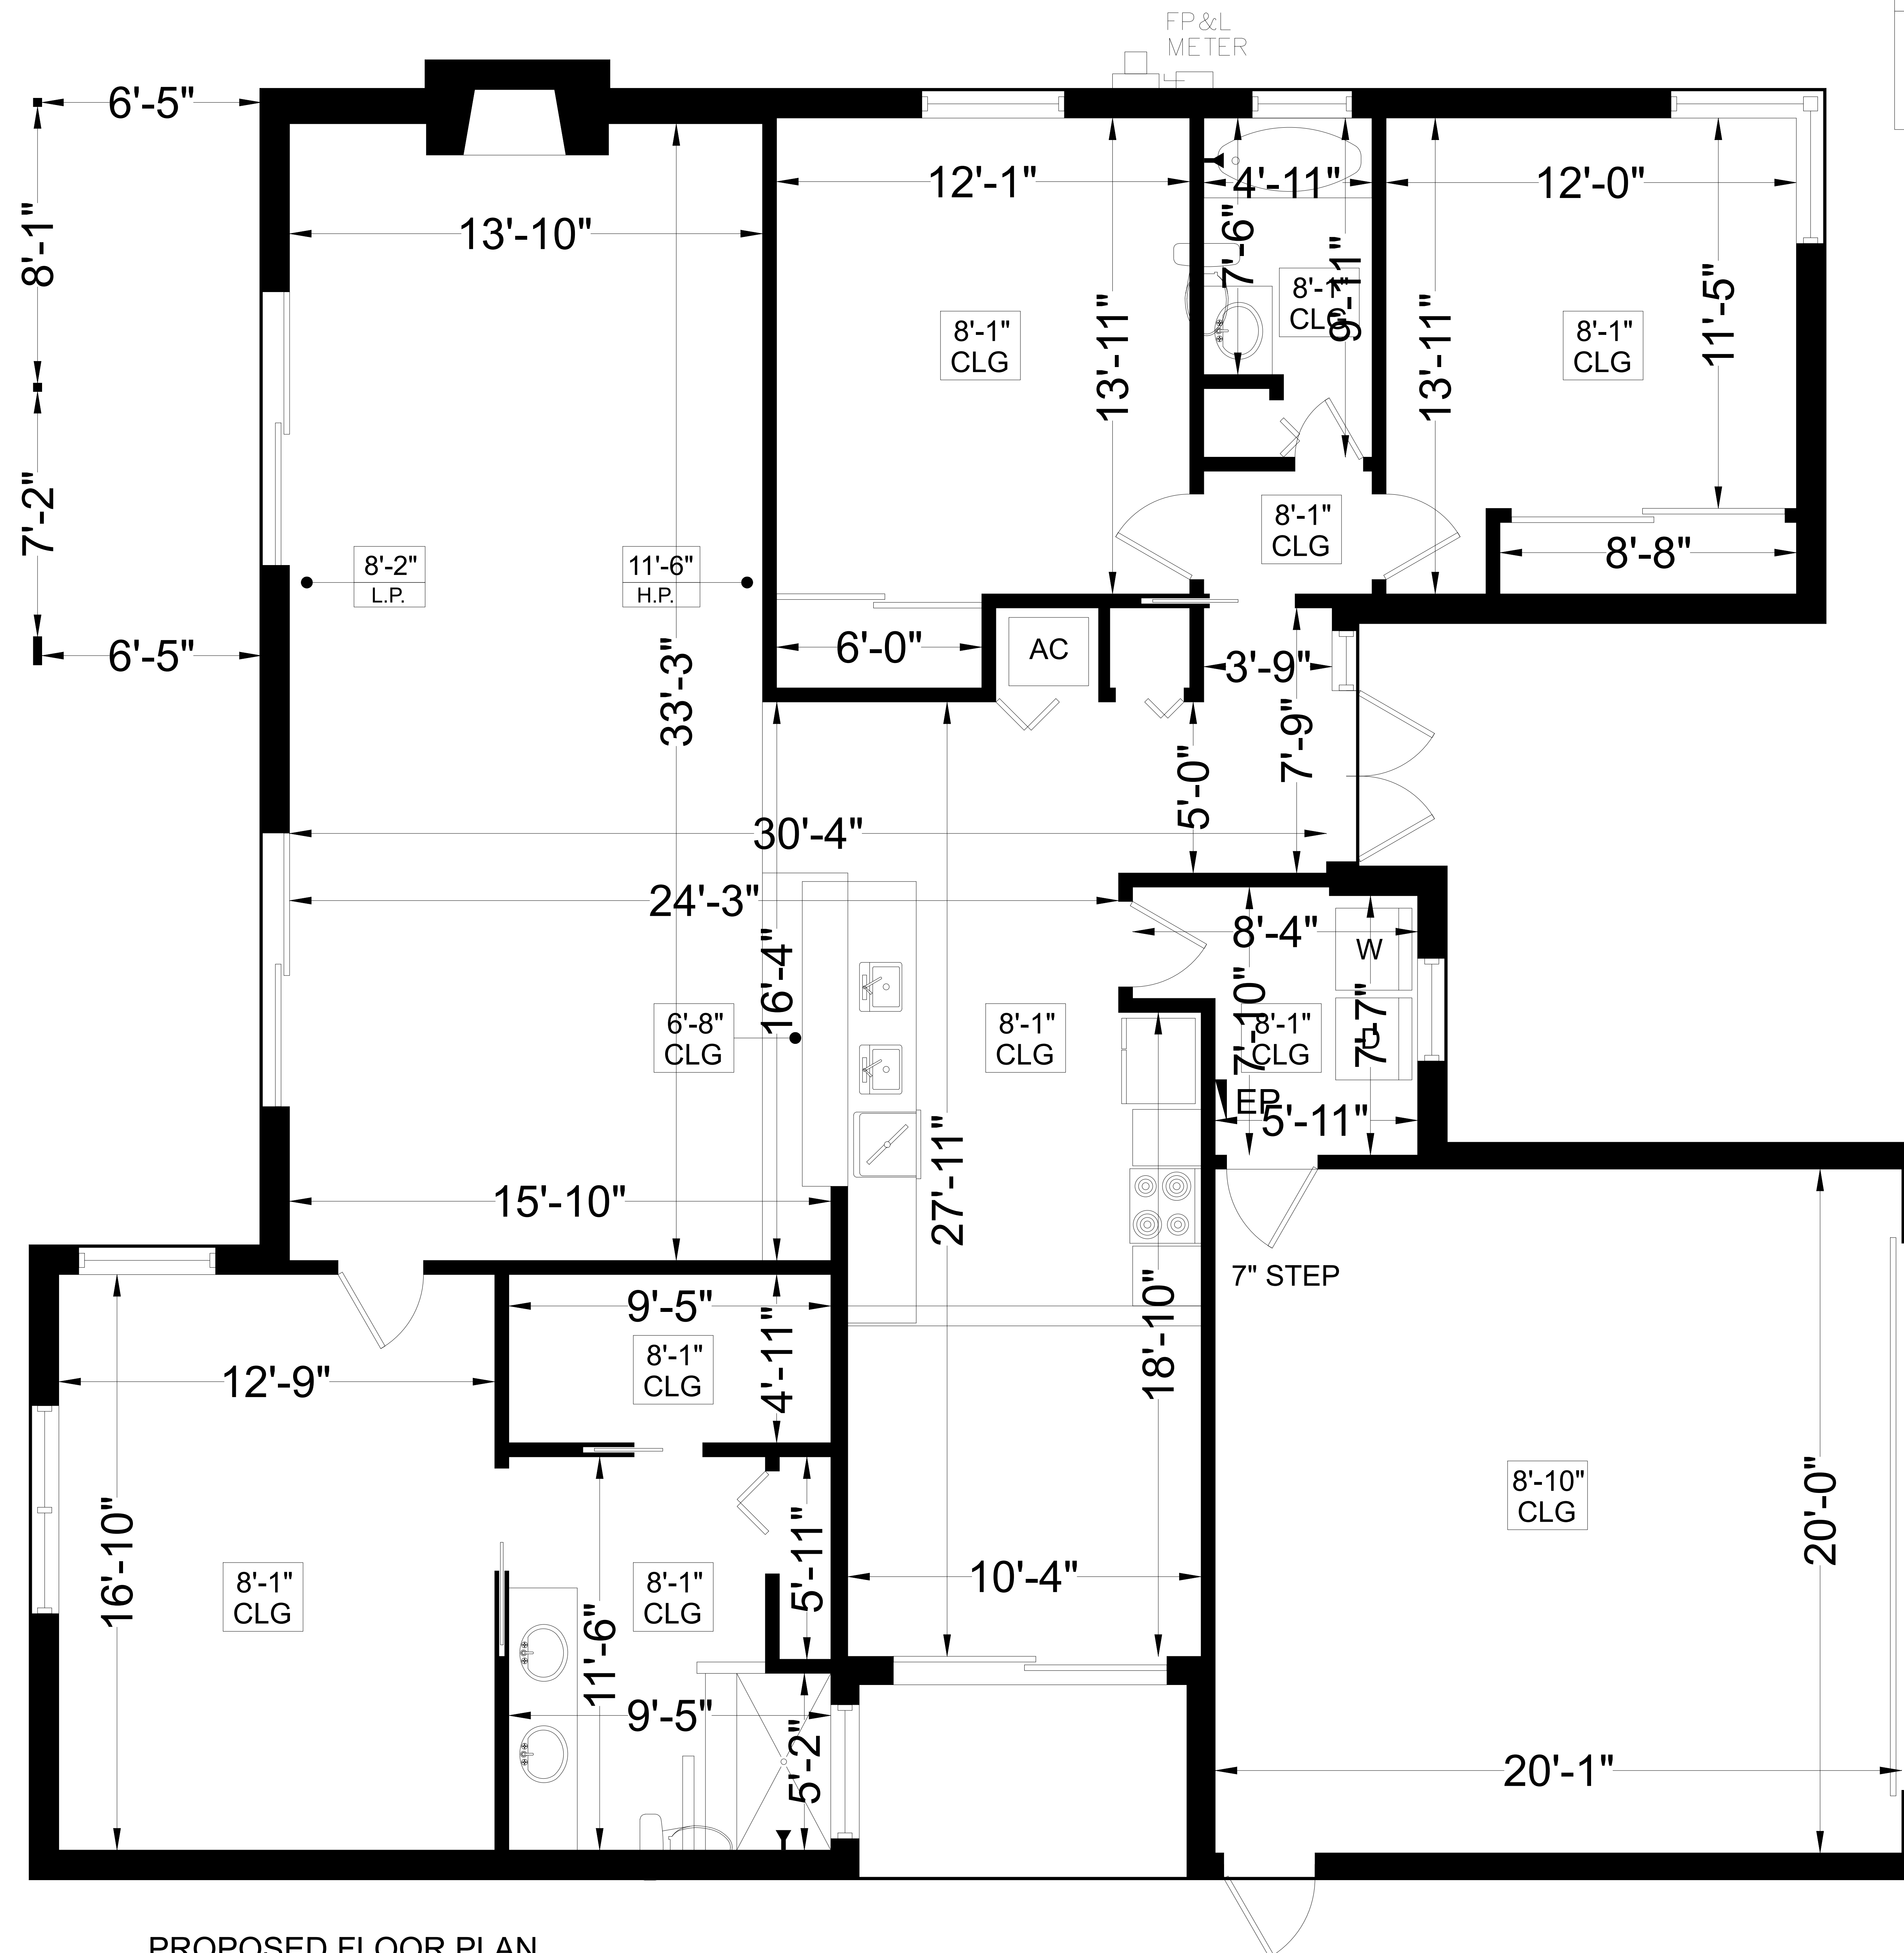


PROPOSED FLOOR PLAN
3/8" = 1'-0"

GENERAL NOTES:


- 1. REFER TO STRUCTURAL DRAWINGS FOR DETAIL ON ALL NEW OPENINGS.

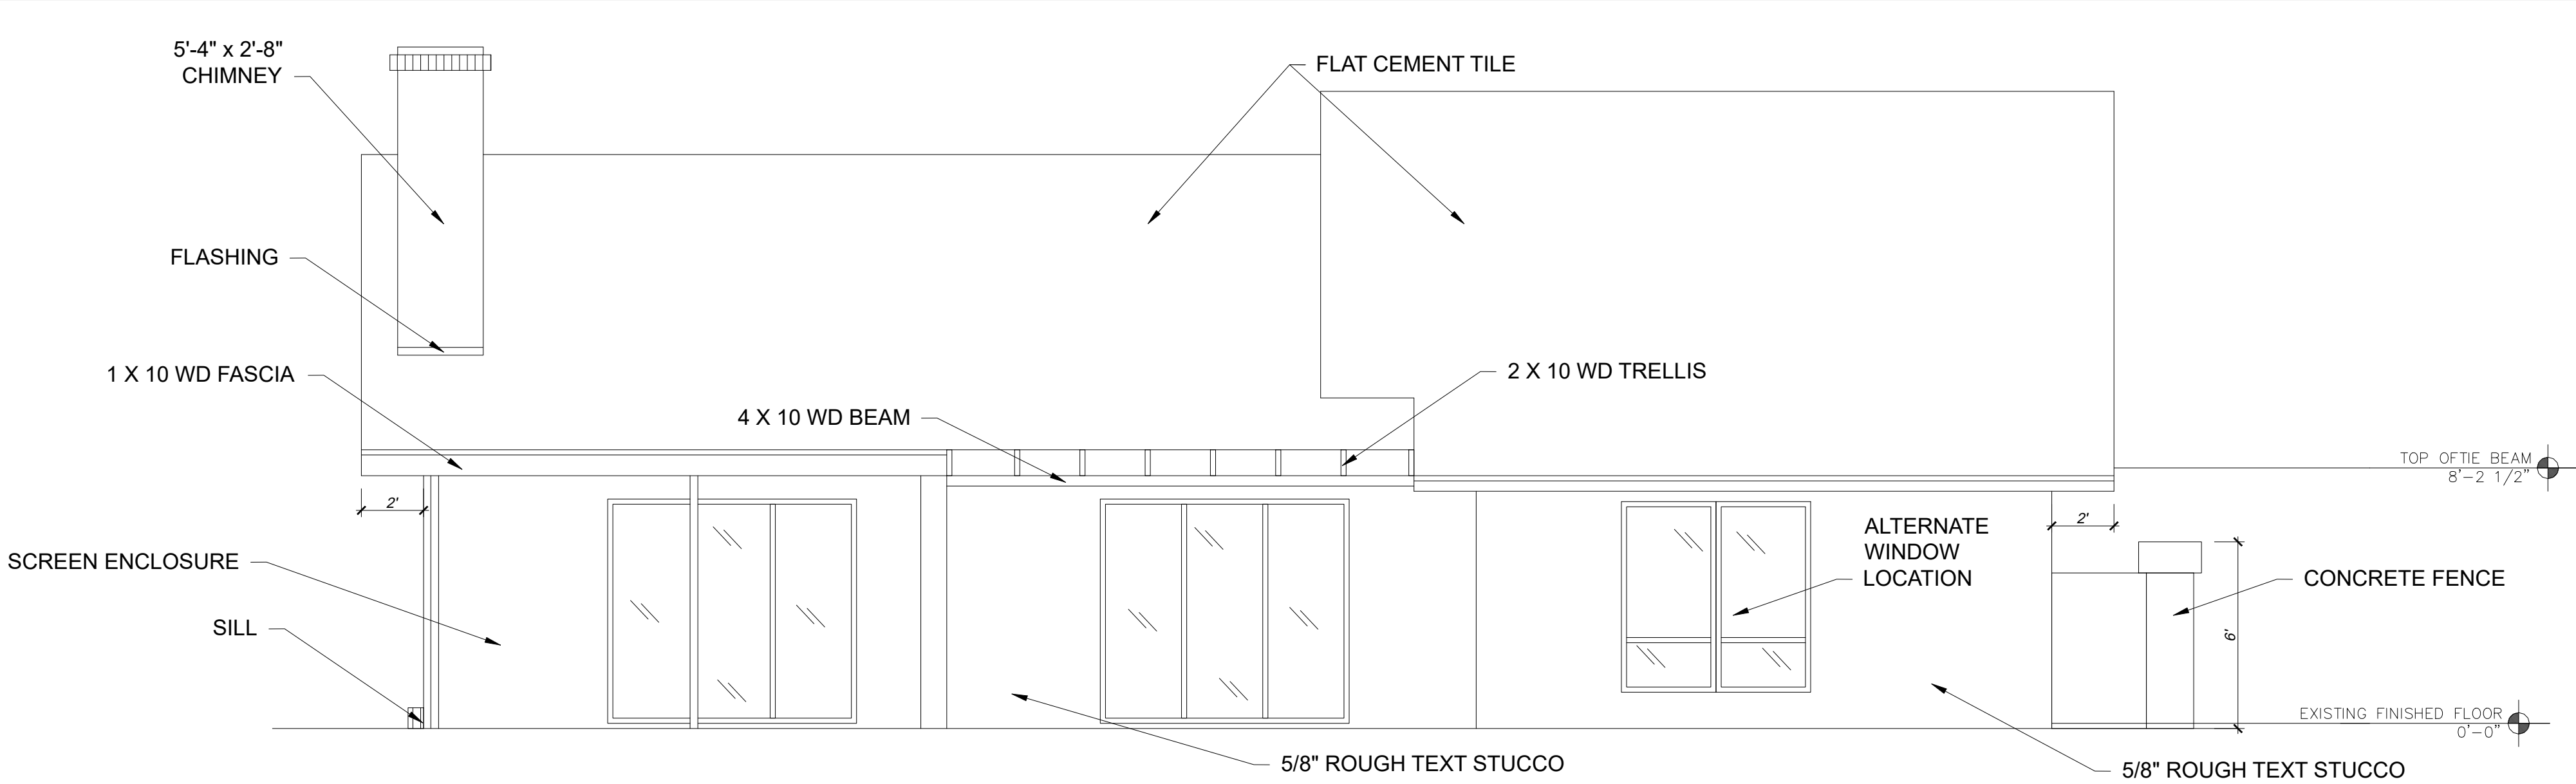


REAR ELEVATION
3/16" = 1'-0"

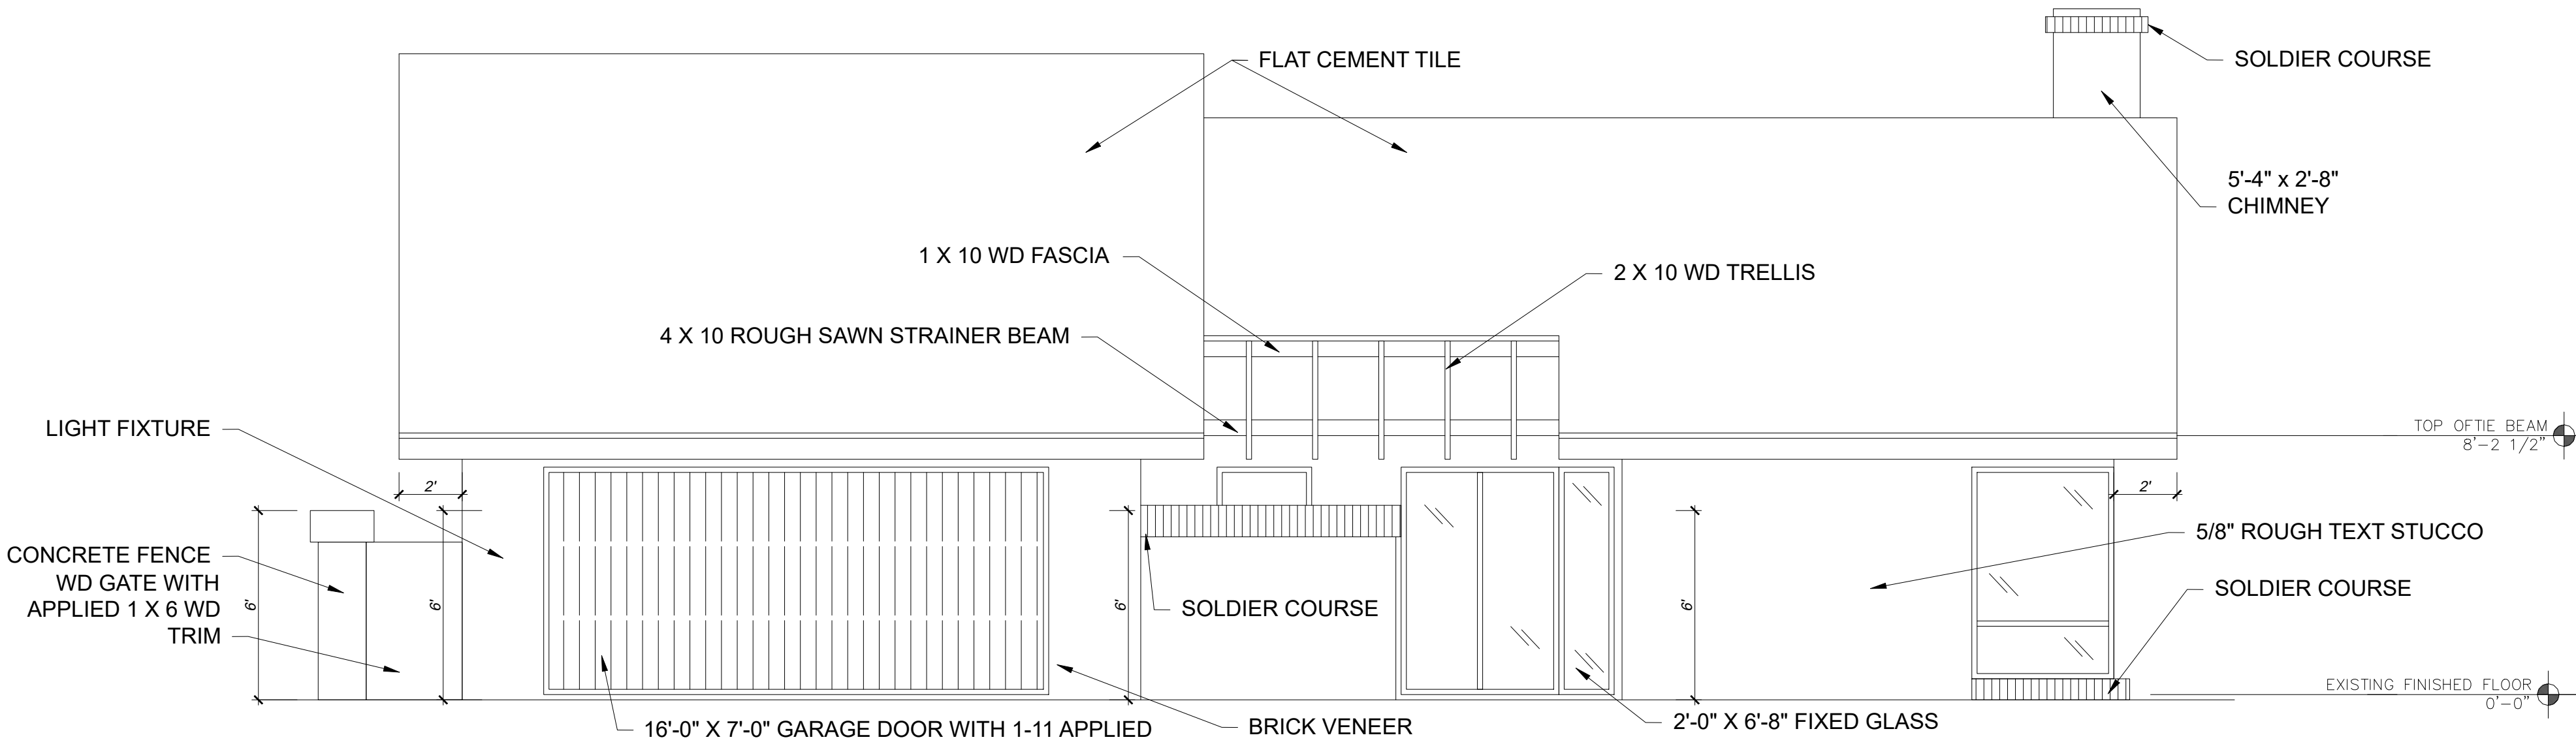

FRONT ELEVATION
3/16" = 1'-0"

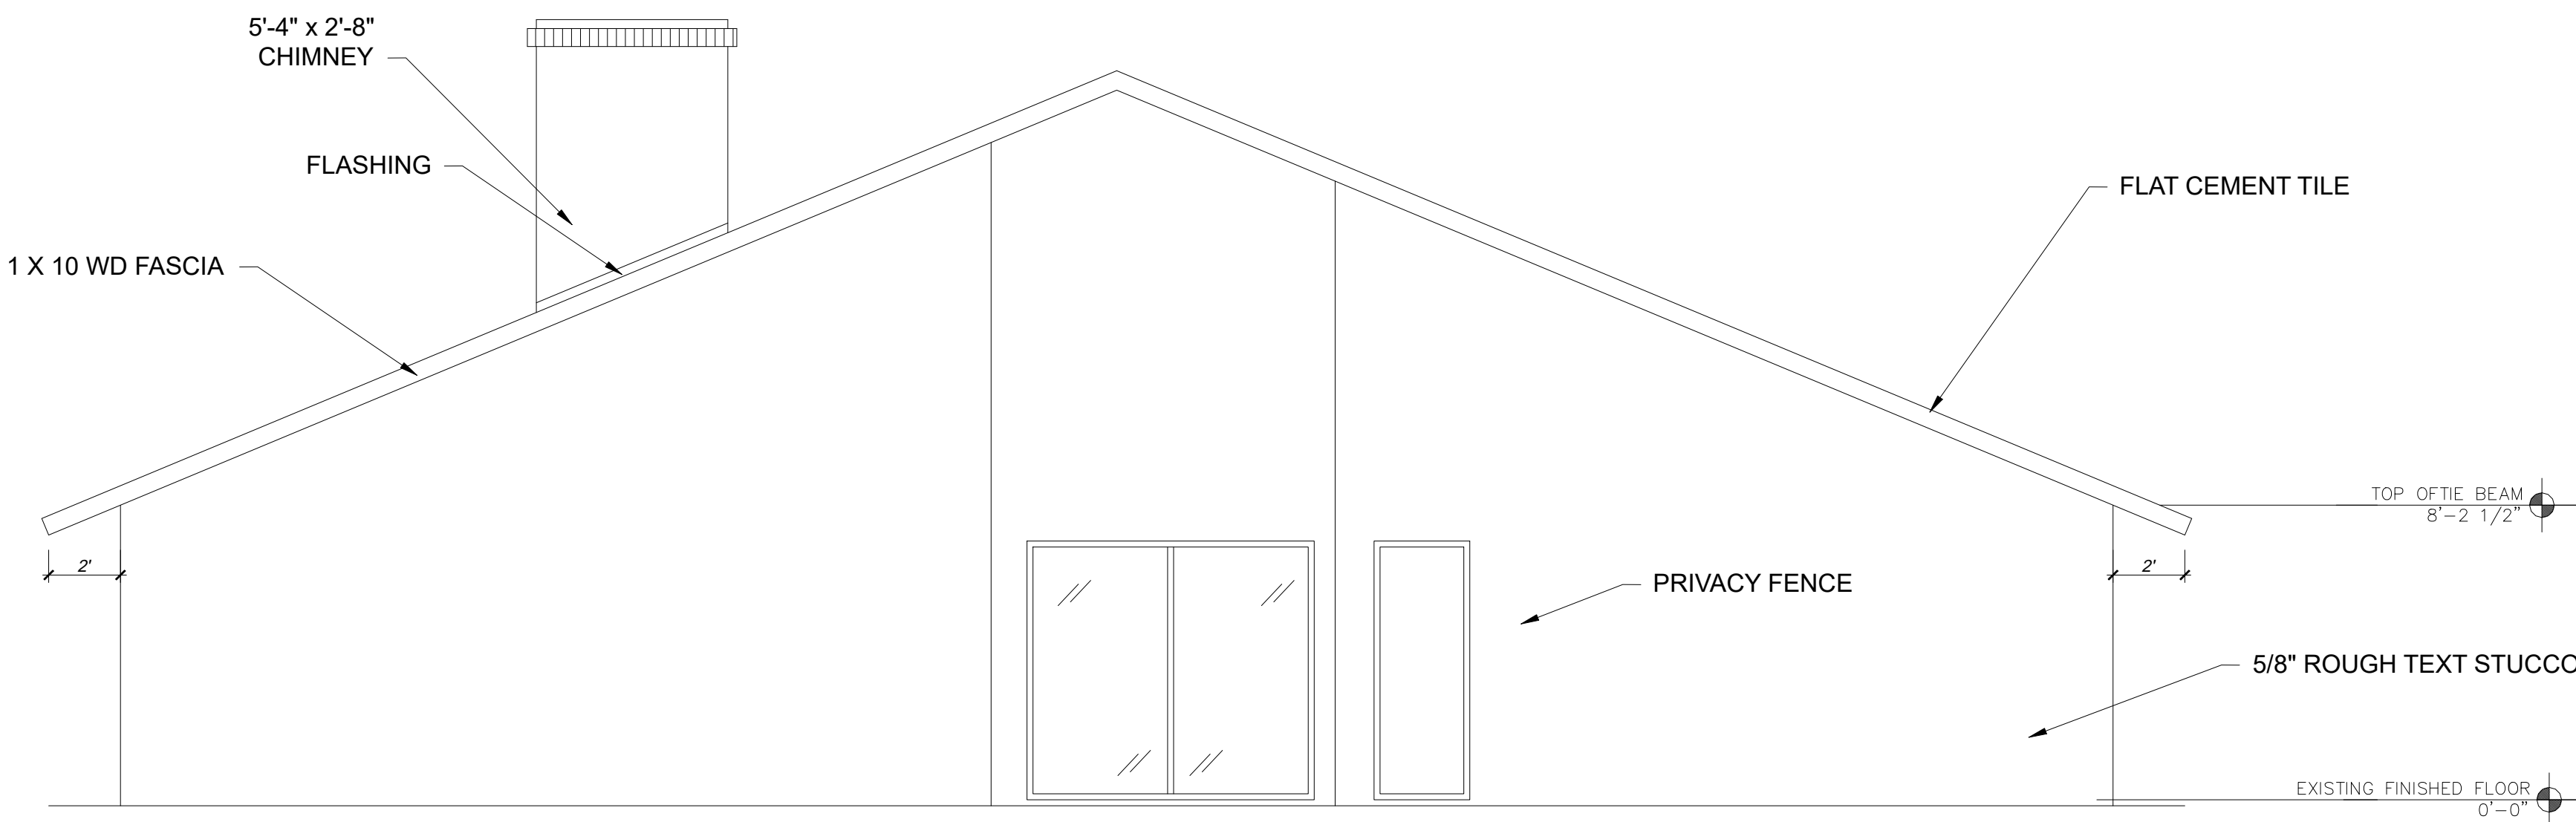

LEFT SIDE ELEVATION
3/16" = 1'-0"

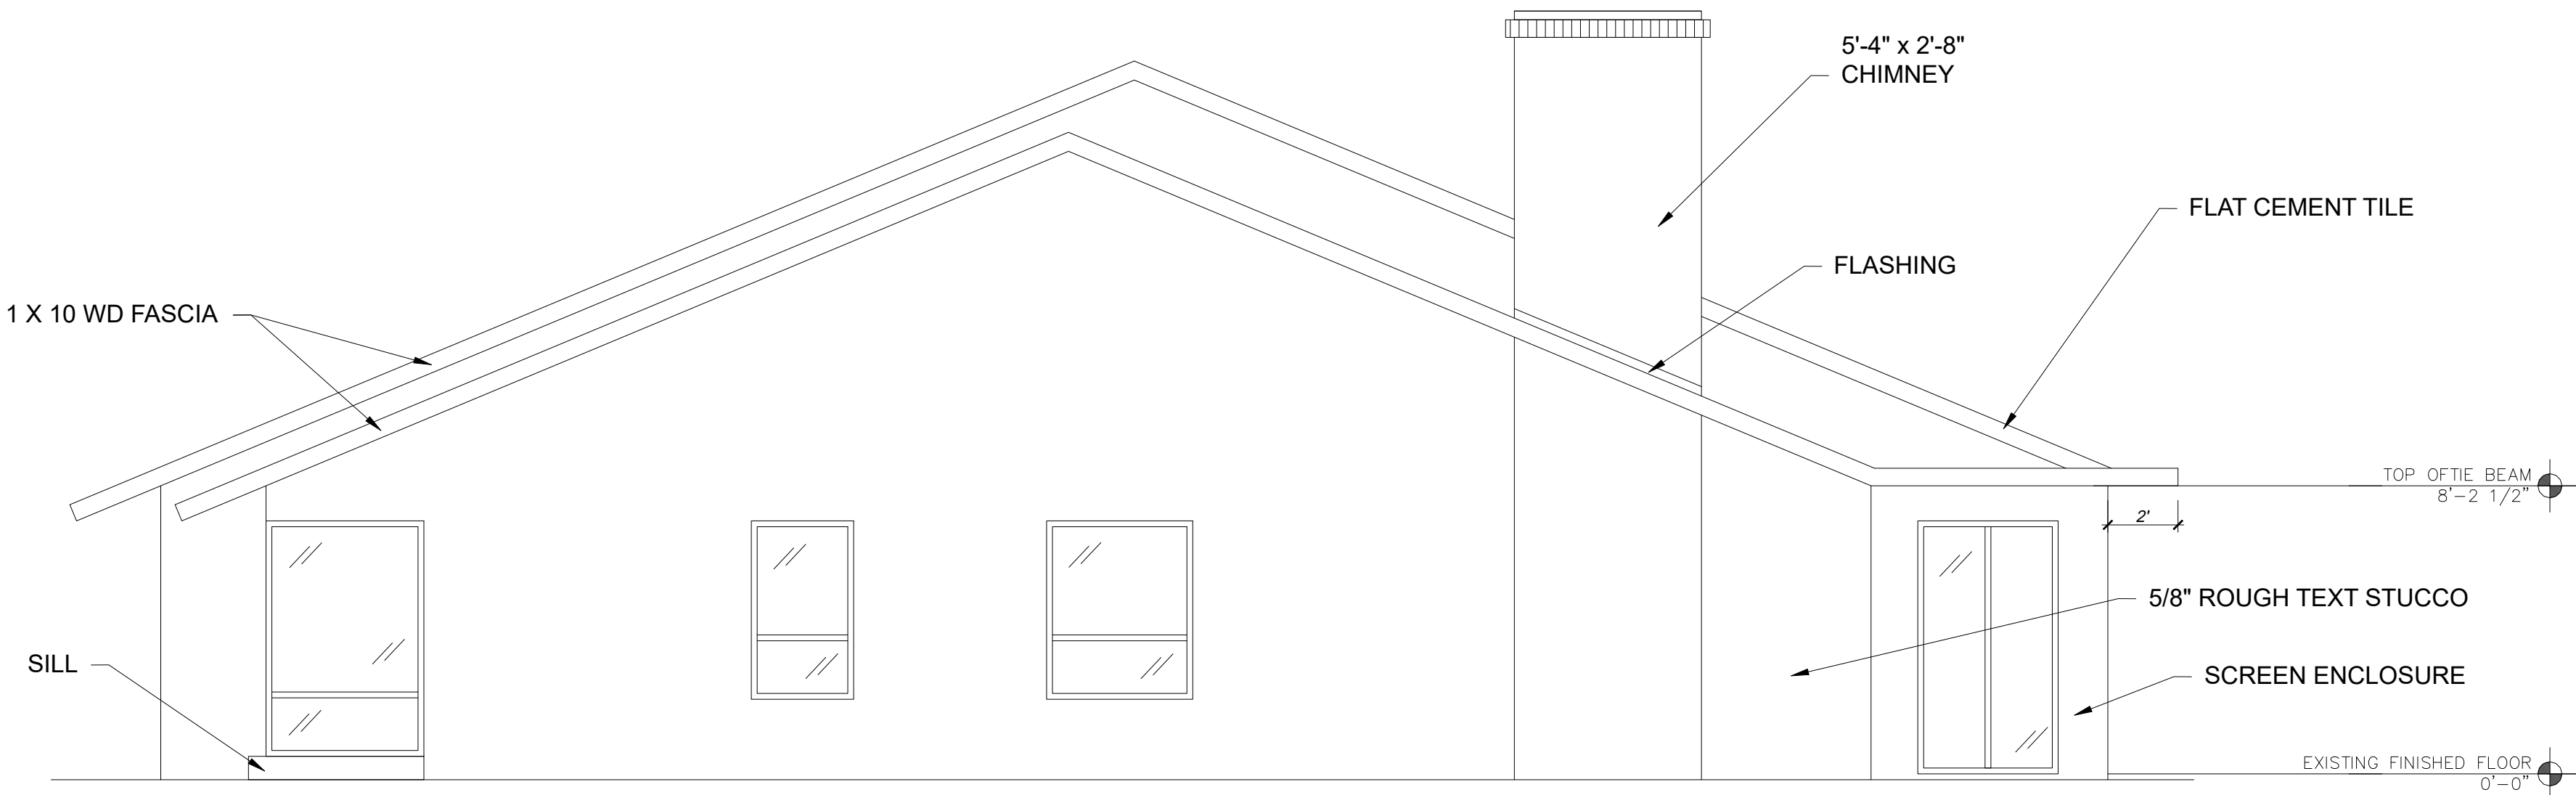

RIGHT SIDE ELEVATION
3/16" = 1'-0"